US 20230152067A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2023/0152067 A1**

**Fortney** (43) **Pub. Date: May 18, 2023**

(54) **DIRECTIONAL HIGH-ENERGY RADIO FREQUENCY WEAPON**

(71) Applicant: **Science Applications International Corporation**, Reston, VA (US)

(72) Inventor: **George G. Fortney**, Reston, VA (US)

(21) Appl. No.: **18/150,284**

(22) Filed: **Jan. 5, 2023**

**Related U.S. Application Data**

(63) Continuation of application No. 17/503,499, filed on Oct. 18, 2021, now Pat. No. 11,578,952, which is a continuation of application No. 17/024,283, filed on Sep. 17, 2020, now Pat. No. 11,187,499.

**Publication Classification**

(51) **Int. Cl.**
*F41H 13/00* (2006.01)

(52) **U.S. Cl.**
CPC ..... ***F41H 13/0075*** (2013.01)

(57) **ABSTRACT**

Systems, methods and apparatus are described for a HERF weapon that may emit high-energy radio waves at a target based on locational information and a frequency associated with the target. The HERF weapon may receive the frequency and locational information from a sensing system. The HERF weapon may emit a high energy pulse toward the target and on the frequency associated with the target to disable or destroy the target without affecting nearby devices. The HERF weapon may allow the user to avoid detection by using a frequency that corresponds to the target's operating frequency.

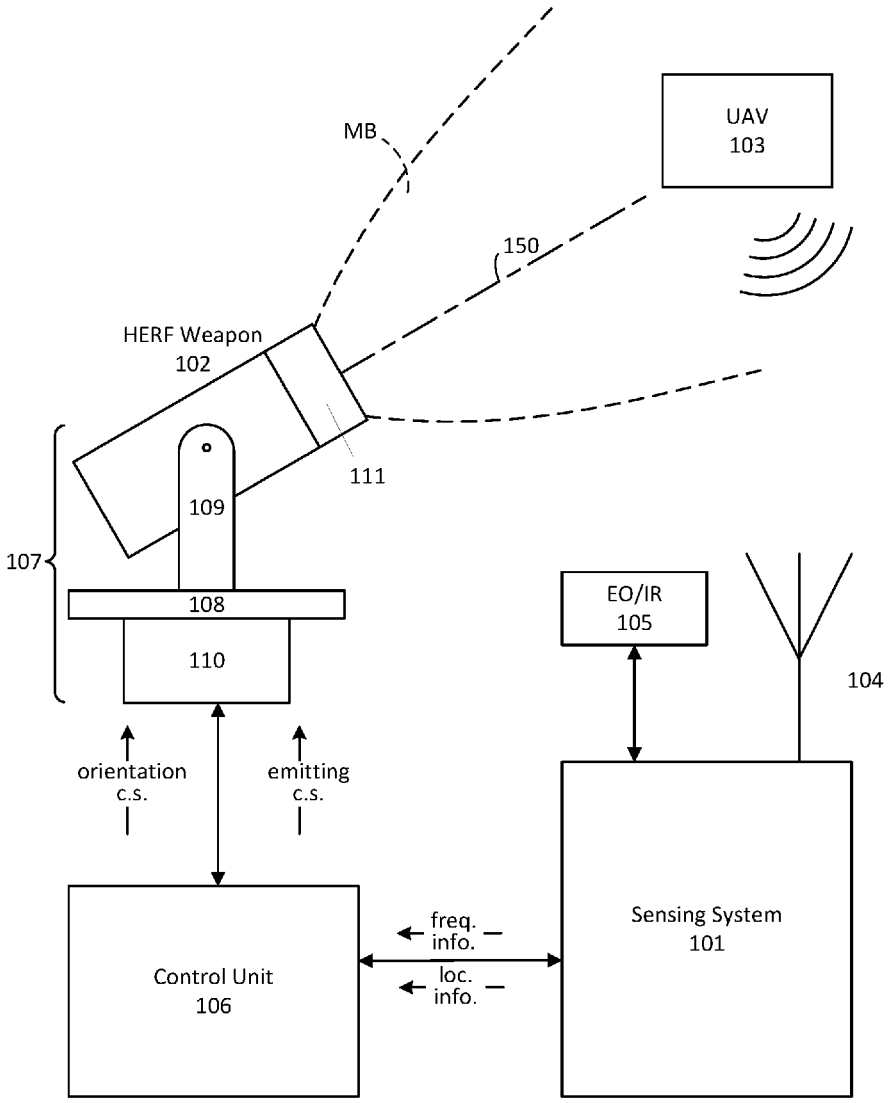


100

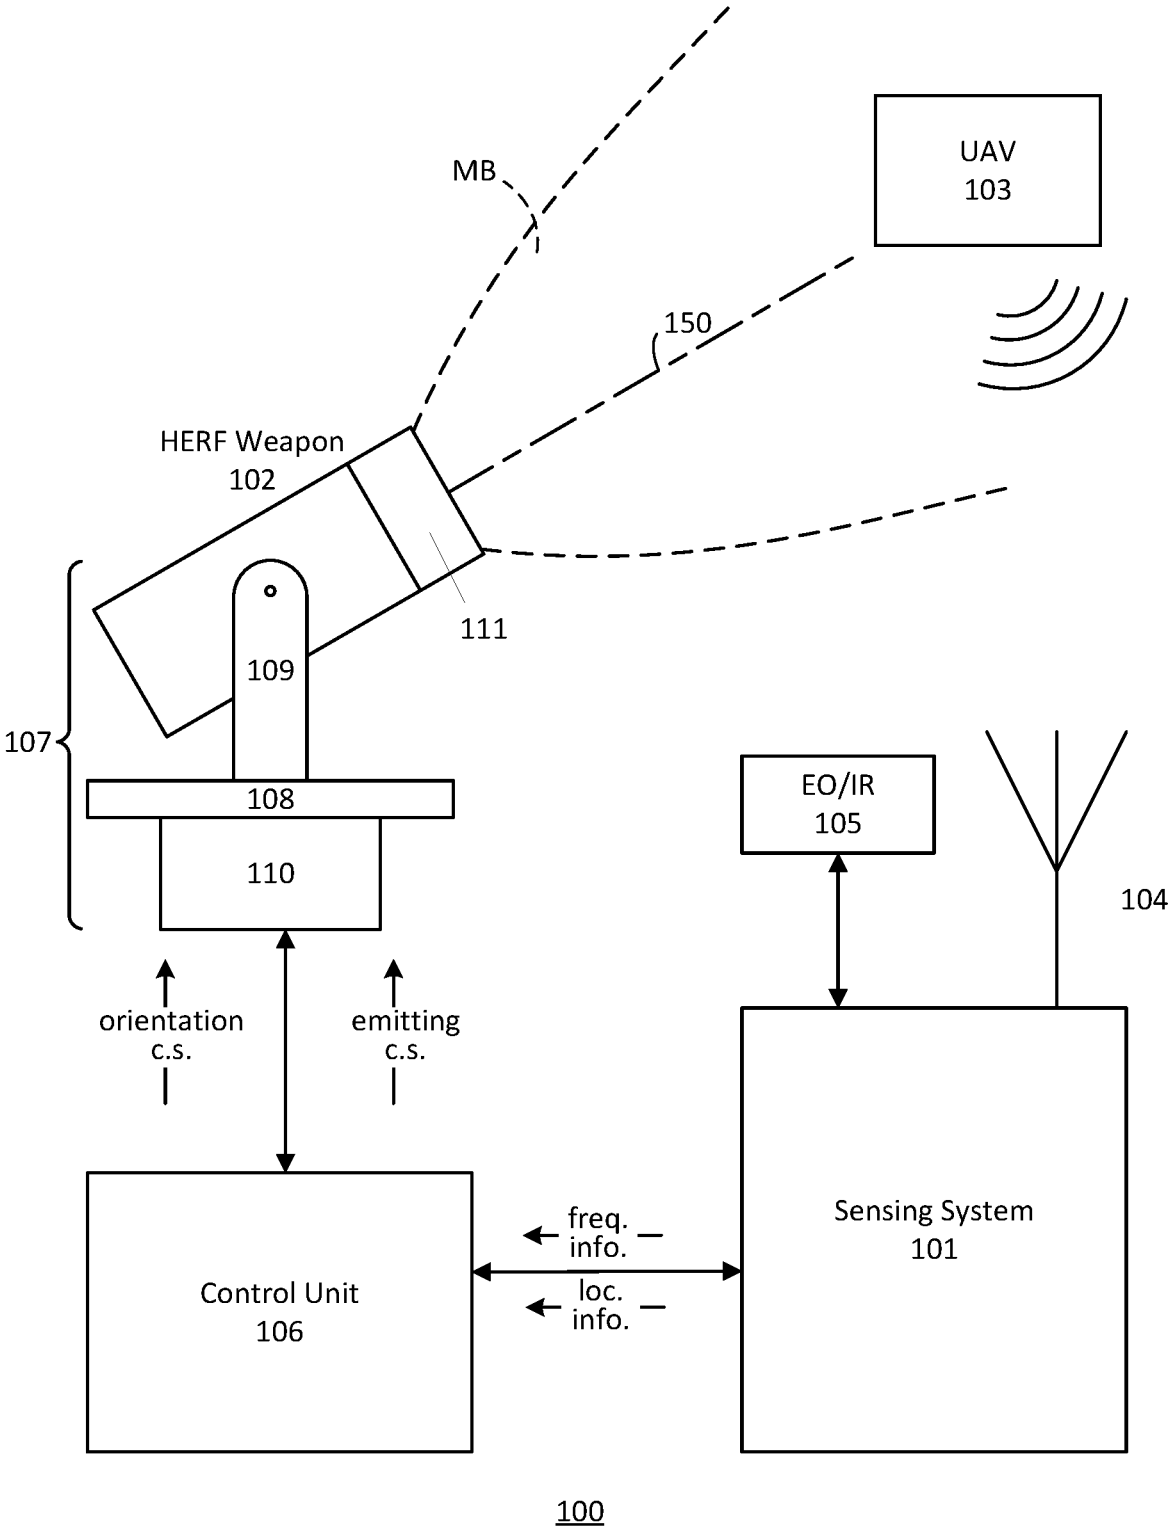
MB
UAV
103
150
HERF Weapon
102
111
109
107
108
110
EO/IR
105
104
orientation
c.s.
emitting
c.s.
freq.
info.
loc.
info.
Control Unit
106
Sensing System
101
100

FIG. 1

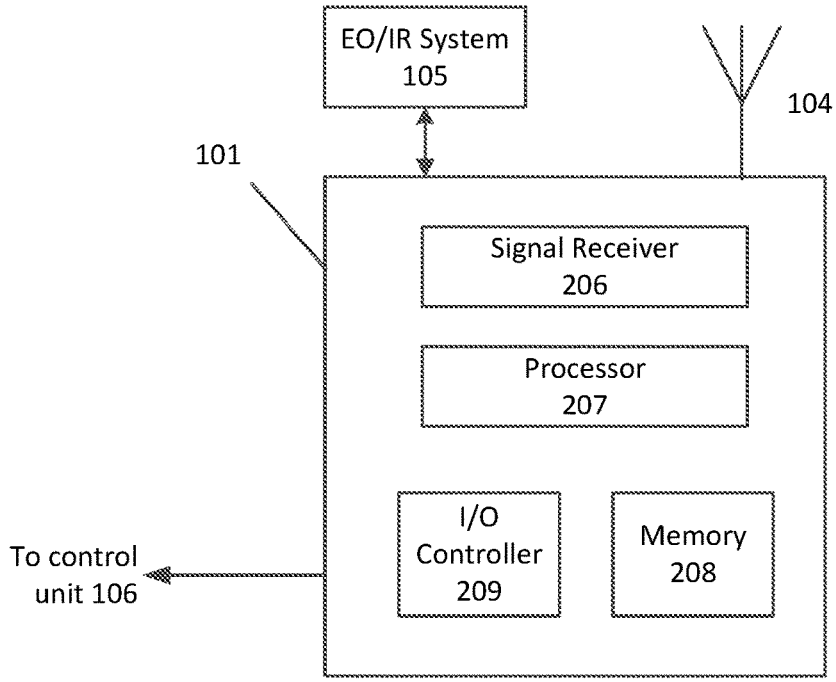
EO/IR System
105
104
101
Signal Receiver
206
Processor
207
I/O
Controller
209
Memory
208
To control
unit 106

FIG. 2

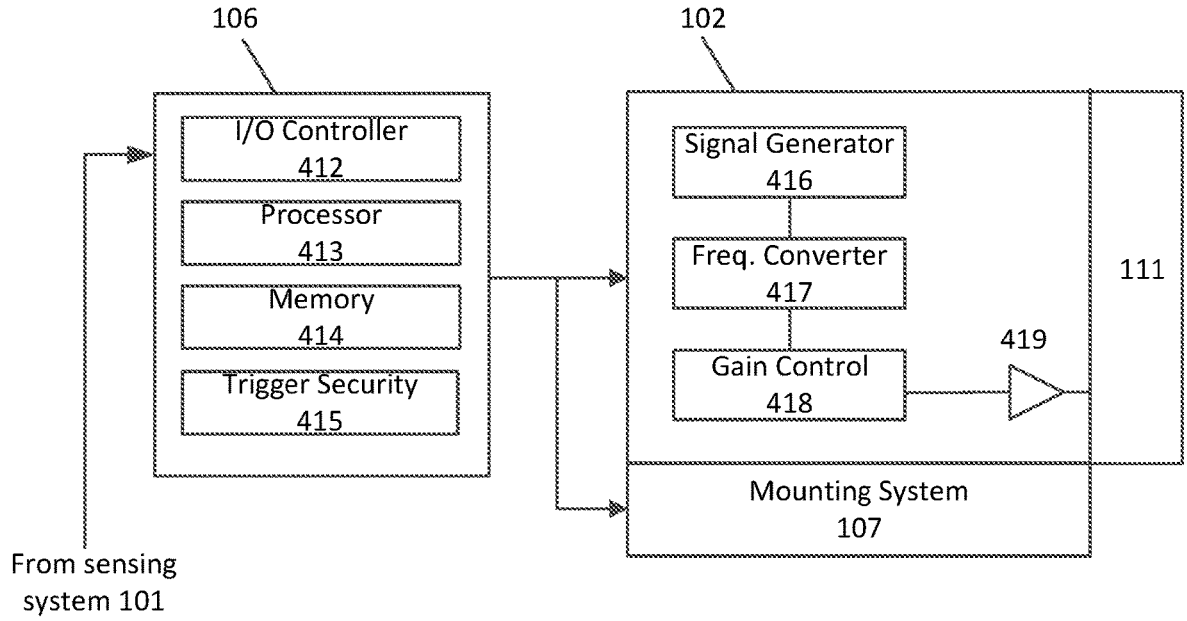
106
102
I/O Controller
412
Processor
413
Memory
414
Trigger Security
415
Signal Generator
416
Freq. Converter
417
Gain Control
418
419
111
Mounting System
107
From sensing
system 101

FIG. 4

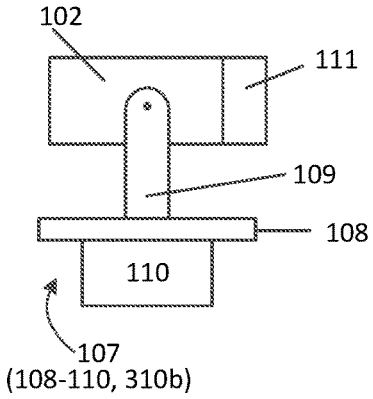


FIG. 3A

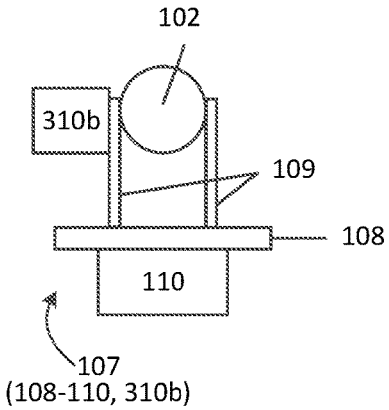


FIG. 3B

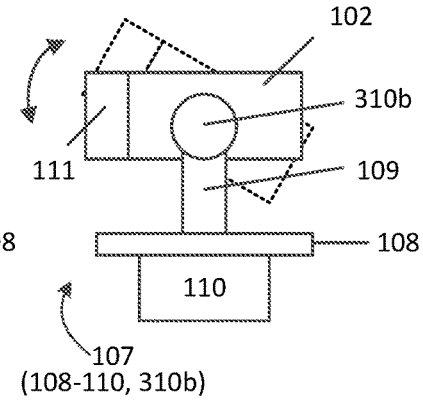


FIG. 3C

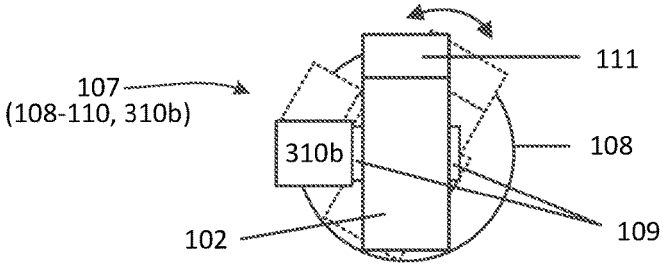


FIG. 3D

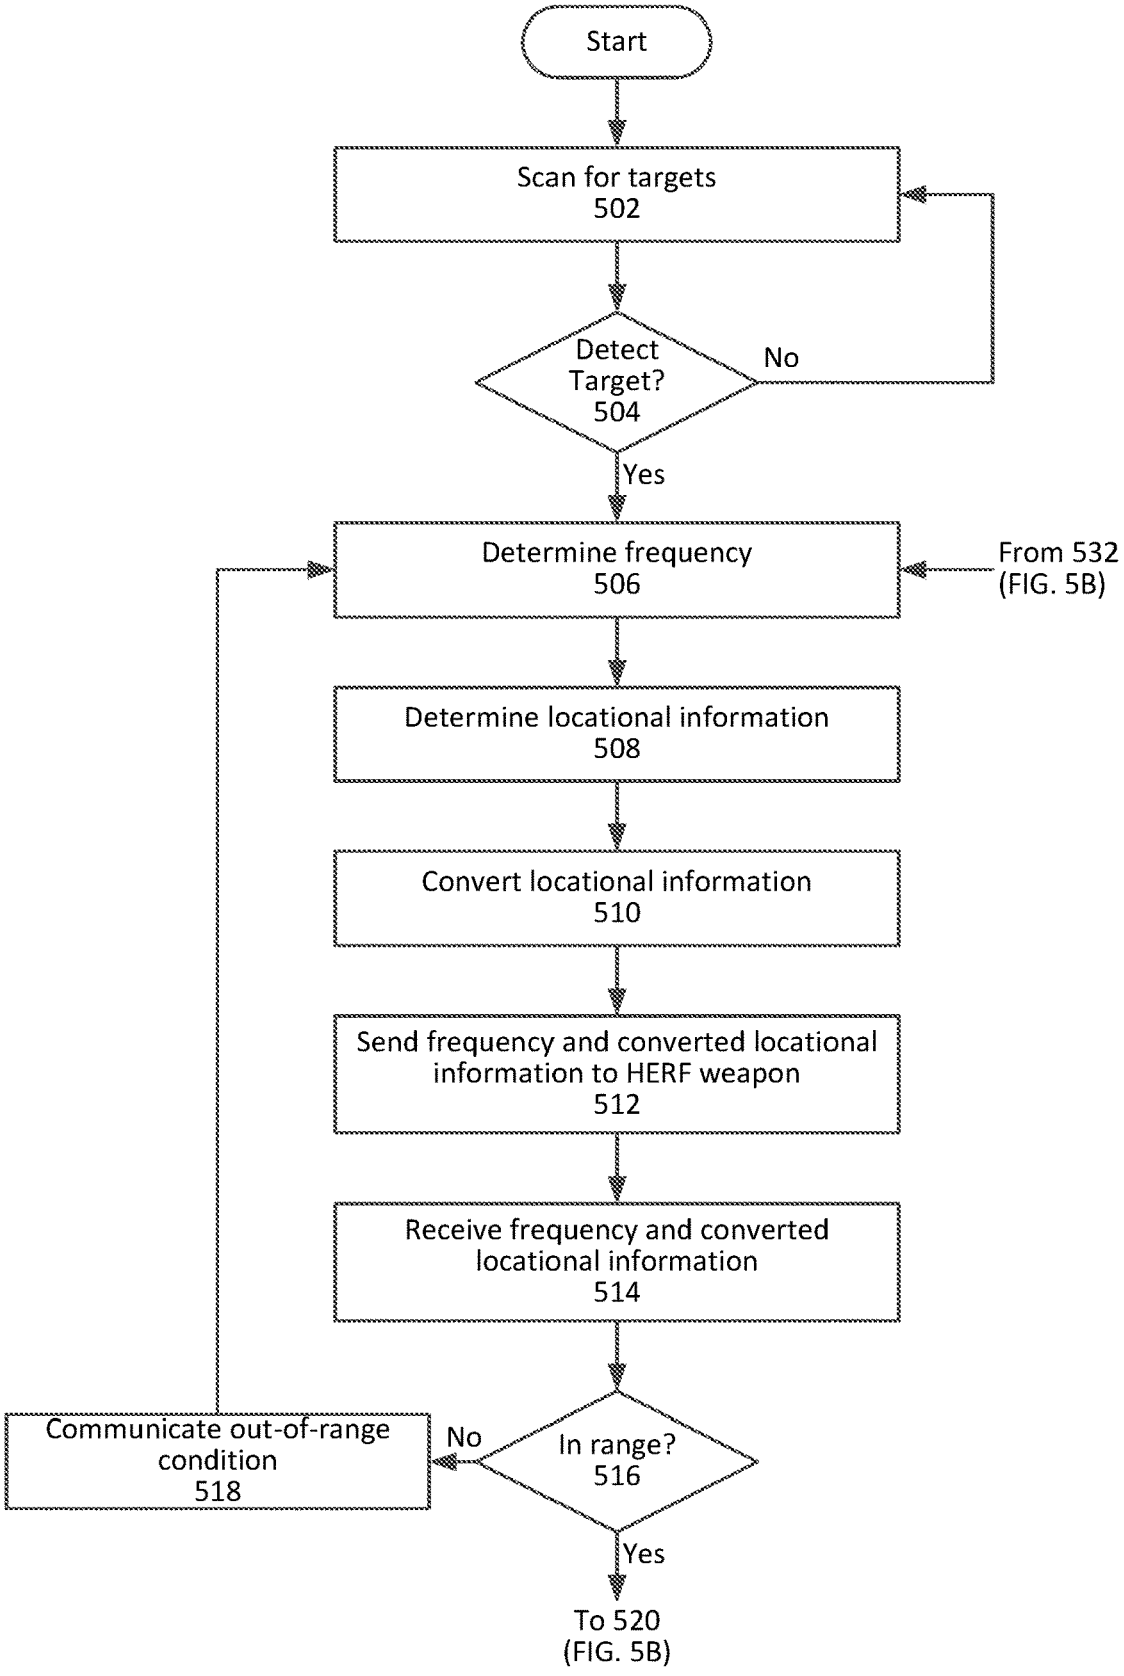
Start
Scan for targets
502
Detect
Target?
504
No
Yes
Determine frequency
506
From 532
(FIG. 5B)
Determine locational information
508
Convert locational information
510
Send frequency and converted locational information to HERF weapon
512
Receive frequency and converted locational information
514
In range?
516
No
Communicate out-of-range condition
518
Yes
To 520
(FIG. 5B)

FIG. 5A

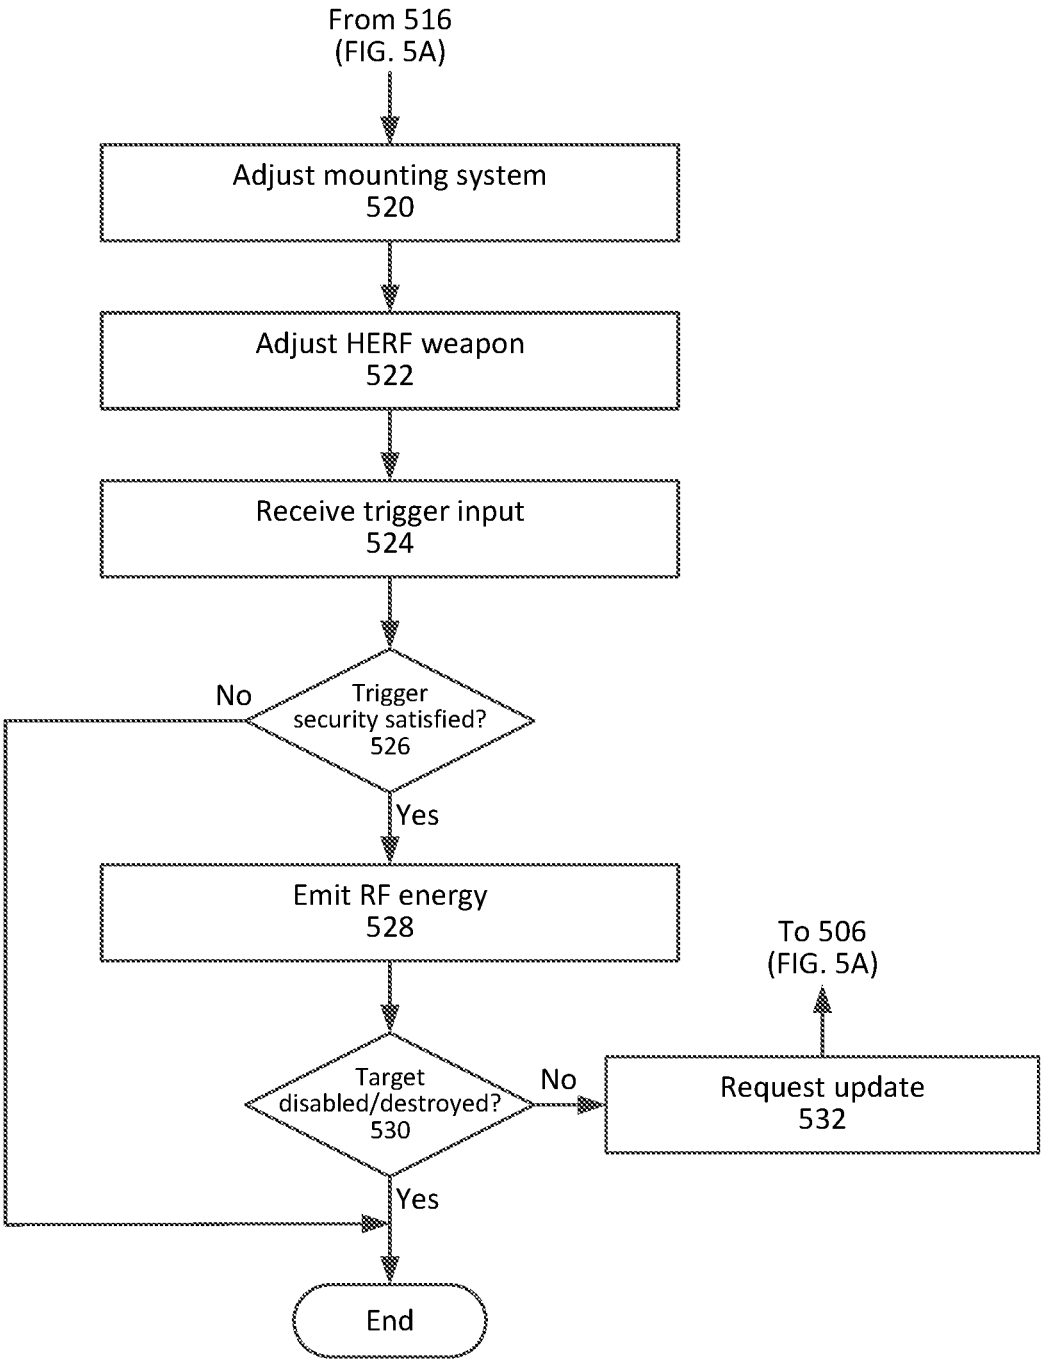
From 516
(FIG. 5A)
Adjust mounting system
520
Adjust HERF weapon
522
Receive trigger input
524
Trigger
security satisfied?
526
No
Yes
Emit RF energy
528
Target
disabled/destroyed?
530
No
Request update
532
To 506
(FIG. 5A)
Yes
End

FIG. 5B

# DIRECTIONAL HIGH-ENERGY RADIO FREQUENCY WEAPON

## CROSS-REFERENCE TO RELATED APPLICATIONS

**[0001]** This application is a continuation of co-pending U.S. application Ser. No. 17/503,499, filed on Oct. 18, 2021 and entitled "Directional High-Energy Radio Frequency Weapon," which is a continuation of U.S. application Ser. No. 17/024,283 (now U.S. Pat. No. 11,187,499), filed on Sep. 17, 2020 and entitled "Directional High-Energy Radio Frequency Weapon," the entireties of which are hereby incorporated herein by reference.

## BACKGROUND OF THE INVENTION

**[0002]** A directed energy weapon (DEW) may direct high-intensity radio waves, a laser, microwaves, and/or particle beams toward at a target. Such targets may include any device with electronic circuitry including, for example, unmanned aerial vehicles (UAV) and/or unmanned ground vehicles (UGVs). DEW devices may disrupt or destroy a target by overloading the target's electronic circuits with excessive energy causing the target to lose data and/or crash. These broad spectrum DEW devices may lack precision and may also disrupt or destroy unintended electronic devices in the surrounding area. Additionally, due to the broad spectrum of energy emitted, using such DEW devices may broadcast a location of the DEW device to hostile forces, putting the DEW device and any operator of the DEW device at risk for counterattack.

## SUMMARY OF THE INVENTION

**[0003]** This Summary is provided to introduce a selection of some concepts in a simplified form as a prelude to the Detailed Description. This Summary is not intended to identify key or essential features.

**[0004]** A high energy radio frequency (HERF) weapon may emit high-energy radio waves at a target using locational and frequency information associated with the target. The HERF weapon may receive the frequency and locational information regarding a UAV or other target from a passive surveillance system. The HERF weapon may send directed radio frequency (RF) energy in the LOB on the specific frequency associated with the target. Directing RF energy toward the target and at a specific frequency may disable and/or destroy the target without affecting nearby devices, thereby mitigating collateral damage. Emitting RF energy at frequencies limited to targets, rather than emitting broad spectrum RF energy, may allow the HERF weapon to avoid detection.

**[0005]** These and other features are described in more detail below.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0006]** Some features are shown by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements.

**[0007]** FIG. **1** is a block diagram of an example HERF weapon system for detecting a UAV and for disabling and/or destroying the detected UAV.

**[0008]** FIG. **2** is a block diagram showing additional details of a sensing system shown as part of the example system of FIG. **1**.

**[0009]** FIGS. **3**A, **3**B, **3**C, and **3**D are block diagrams showing additional details of a HERF weapon and mounting system shown as part of the example system of FIG. **1**.

**[0010]** FIG. **4** is a block diagram showing additional details of the HERF weapon and mounting system shown as part of the example system of FIG. **1**.

**[0011]** FIGS. **5**A and **5**B are a flow chart showing an example method for detecting, gathering information regarding, disabling, and/or destroying a potential target.

## DETAILED DESCRIPTION

**[0012]** The accompanying drawings, which form a part hereof, show examples of the disclosure. It is to be understood that the examples shown in the drawings and/or discussed herein are non-exclusive and that there are other examples of how the disclosure may be practiced.

**[0013]** FIG. **1** shows an example HERF weapon system **100** in which features described herein may be implemented. The HERF weapon system **100** may be in a fixed location. The HERF weapon system **100**, or portions thereof, may be mobile and may be located, for example, on a land vehicle, an aircraft, or a ship. Additionally, or alternatively, the HERF weapon system **100** (or portions thereof) may be portable and/or carried by a human operator.

**[0014]** The HERF weapon system **100** may comprise a sensing system **101** and one or more weapons, such as a HERF weapon **102**. The sensing system **101** may comprise one or more computing device(s) configured to receive and process signals and information regarding a target (e.g., a UAV) and send information regarding the target to a control unit **106** associated with the HERF weapon **102**. A computing device may comprise one or more processors and memory storing instructions that, when executed by the one or more processors, may cause the computing device to perform functions described herein. The sensing system **101** may comprise, for example, the Titan3 defense system available from Citadel Defense Company.

**[0015]** The sensing system **101** may be configured to collect intelligence regarding targets, such as a UAV **103**, to assist in assessing the threat level of, and/or elimination of, the target. The UAV **103** may be any type of unmanned aerial vehicle including, for example, an autonomous UAV operated by an onboard computer, a UAV remotely controlled from the ground, a UAV with or without a payload, a multi-rotor UAV, a single rotor UAV, a fixed wing UAV, a fixed wing hybrid UAV, a hobbyist UAV, a commercial UAV, a military UAV, etc.

**[0016]** A UAV may be configured to transmit and/or receive communications in one or more frequency bands, such as for example, 2.4 GHz, 5.8 GHz, unlicensed 900 MHz and UHF bands, 5030-5091 MHz for terrestrial control links, or 10.95-30.0 GHz for satellite control systems. The communication frequency(ies) of a UAV may be constant, may change automatically or may be changed by a control signal. UAVs may be configured to operate as a single unit or as a coordinated group of UAVs (e.g., a swarm). UAVs that operate as a coordinated group may be configured to operate at the same frequency.

**[0017]** The sensing system **101** may be co-located with the HERF weapon **102**. For example, the sensing system **101**, the HERF weapon **102**, and/or other components shown in

FIG. **1** (e.g., the control unit **106** and/or the mounting system **107**) may be contained and/or attached to a common frame or other structure. Also or alternatively, the sensing system **101** may be located remotely from the HERF weapon **102**, the mounting system **107**, and/or the control unit **106**. Although one sensing system **101** and one HERF weapon **102** are shown in FIG. **1**, a HERF weapon system may comprise multiple sensing systems and/or multiple HERF weapons (and/or multiple control units and/or mounting systems). Components of the HERF weapon system **100** may be powered by batteries and/or by other power sources.

**[0018]** The sensing system **101** may comprise and/or be configured to receive signals from an antenna **104**, an electro-optical/infra-red (EO/IR) system **105**, and/or any other sensor devices that may detect the UAV **103**. The antenna **104** may comprise a directional antenna, a multi-directional antenna and/or an omni-directional antenna. Although only one antenna **104** is shown in FIG. **1**, the sensing system **101** may include any number of antennas. When multiple antennas are employed, the antennas may be located separately or may be co-located as an antenna array. The antenna **104** may be configured to receive and/or emit signals. The antenna **104** may be configured to monitor one or more radio frequencies for signals and send the signals to the sensing system **101**. The frequencies may be monitored continuously or on demand. The frequencies may also be monitored based on input from a user. The EO/IR system **105** may be co-located with the sensing system **101** or may be located apart from the sensing system **101**. The EO/IR system **105** may comprise visual and/or infrared sensors and may comprise one or more cameras, including regular, low-light and/or night vision cameras, thermal imaging sensors, and the like. The EO/IR system **105** may be configured to detect the UAV **103**, and send information about the UAV **103** to the sensing system **101**, including for example, video, images and/or thermal scans of the UAV **103**. The EO/IR system **105** may also be configured to assist in determining locational information regarding the UAV and/or to track any identified targets to assess the threat level associated with the target. The EO/IR system **105** may comprise, for example, a system configured to detect a UAV and/or determine locational information for the UAV using one or more cameras. Examples of such systems are described, for example, in U.S. patent application Ser. No. 16/779,917, titled "Detecting Target Objects in a 3D Space" and filed Feb. 3, 2020, which application is incorporated by reference herein.

**[0019]** Based on detecting a signal emitted from the UAV **103**, or detecting the UAV **103** visually, the sensing system **101** may be configured to receive information from the antenna **104**, the EO/IR system **105**, and/or any other sensor devices. The sensing system **101** may be configured to utilize the information regarding the UAV **103** to determine a type of equipment associated with the detected signal and/or one or more frequencies of the signal. The sensing system **101** may also be configured to determine locational information for the UAV **103** using radiolocation, triangulation, trilateration, multilateration, GSM localization, geolocation, and/or other known methods of locating a signal transmitter. Locational information may, for example, comprise coordinates in 3D space, range, direction, angle of arrival (AoA) of a signal from a UAV (e.g., azimuth and elevation angles), line of bearing (LOB) to a UAV (e.g., azimuth and elevation angles), speed of travel, and/or course of travel.

**[0020]** The sensing system **101** may be configured to determine a range to the UAV **103** using any known method of range finding. The sensing system **101** may, for example, comprise a laser range finder. The sensing system **101** may also be configured to determine an altitude of the UAV **103**, an azimuth to the UAV **103**, and/or a line of bearing of the UAV **103**. A LOB may have an altitude (e.g., elevation) component and an azimuth component. The sensing system **101**, if not co-located with the HERF weapon **102**, may be configured to account for differences in locations of the sensing system **101** and the HERF weapon **102** and determine a LOB to the UAV **103** from the HERF weapon **102**.

**[0021]** The sensing system **101** may be configured to display, via an output device (e.g., display screen) information about the UAV **103** and/or signals from the UAV **103**. The sensing system **101** may also be configured to receive input from a user or operator via an input device (e.g., keyboard, mouse, touchscreen). An operator may be able to select signals of interest for further processing, select video and/or images for further inspection, select signals and/or targets for tracking, and/or select targets for elimination. The operator may be able to control the antenna **104**, EO/IR system **105**, and or other types of sensor devices, to seek additional information regarding a potential target to assist in assessing a threat level of a target.

**[0022]** The sensing system **101** may be in communication with the control unit **106** of the HERF weapon **102** and may be configured to automatically send information to the control unit **106** regarding the UAV **103**. That information may comprise frequency information indicating frequencies of signals transmitted from and/or received by the UAV **103**. Also or alternatively, that information may comprise locational information indicating a LOB and/or other locational information for the UAV **103** (e.g., relative the HERF weapon **102**). An operator may also or alternatively be able to manually direct the sensing system **101** to send information regarding the UAV **103** to the control unit **106**. The control unit **106**, which may be co-located with or remote from the HERF weapon **102**, may comprise a display and/or may be configured to receive input from a user or operator.

**[0023]** The HERF weapon **102** may be mounted on, or otherwise connected to, a mounting system **107** that allows the HERF weapon **102** to be moved and aimed at the UAV **103** based on locational information from the sensing system **101**. The mounting system **107** may comprise a base **108**, one or more weapon mount(s) **109**, and/or one or more servo motor(s) **110**. The base **108** may be configured to rotate 360 degrees or less than 360 degrees. The base **108** may comprise one or more gimbals to allow 360 degrees of rotational movement and/or hemispherical movement of the base **108**. The HERF weapon **102** may be pivotally mounted on the weapon mount **109**. The one or more servo motors **110** may configured to control rotation of the base **108** and/or pivoting of the HERF weapon **102** within the weapon mount **109** based on orientation control signals from the control unit **106**.

**[0024]** The control unit **106** may be configured to receive and/or process the frequency and locational information for the UAV **103**, received from the sensing system **101**, for use in aiming the HERF weapon **102** at the UAV **103** and/or in controlling frequency of output from the HERF weapon **102**.

Based on the received locational information, the control unit **106** may be configured to send orientation control signals to the servo motors **110** that cause the mounting system **107** to orient the HERF weapon **102** toward the UAV **103**. For example, the control unit **106** may use the locational information to determine orientation control signals that will cause the servo motors **110** to orient the HERF weapon **102** so that a beam axis **150**, corresponding to a main beam MB of an antenna **111** of the HERF weapon **102**, is pointed toward or near UAV **103** (e.g., so that the beam axis **150** is aligned with a LOB of the UAV relative to the HERF weapon **102**).

**[0025]** The control unit **106** may be configured to process frequency information, received from the sensing system **100**, and determine a frequency (or range of frequencies) for RF energy to be emitted by the HERF weapon **102**, as the main beam MB, while oriented to toward the UAV **103**. The determined frequency or range of frequencies may, for example, comprise a spectrum bandwidth based on signals output by the UAV **103**. Examples of spectrum bandwidths that may be determined comprise +/−1% of a frequency of signals output by the UAV **103**. The control unit may be further configured to send an emitting control signal, to the HERF weapon **102**, that causes the HERF weapon **102** to output RF energy at the determined frequency or frequency range.

**[0026]** The HERF weapon **102** may be configured to receive the emitting control signal from the control unit **106** and to generate, based on that emitting control signal, an RF energy at the frequency (or over the frequency range) indicated by the emitting control signal. The HERF weapon **102** may be further configured to output the generated RF energy via an antenna **111**. The antenna **111** may comprise a directional antenna. The antenna **111** may comprise a parabolic antenna, a helical antenna, a yagi antenna, log-periodic antenna, a horn antenna, a corner reflecting antenna, a phased array antenna, or other type of antenna. The antenna **104** may also be configured to receive signals and act as an antenna (e.g., in conjunction with or instead of the antenna **104**) for the detection system **101**.

**[0027]** To reduce risk of the HERF weapon **102** being located by hostile forces, the antenna **111** may be a directional antenna that concentrates emissions along the beam axis **150** of the main beam MB and that minimizes emissions in other directions. For example, a field of view (FOV) of the main beam MB may be centered on the beam axis **150** and be approximately 20 degrees (e.g., 20 degrees, +/−5 degrees). Within that FOV, the energy output by the HERF weapon **102** may have sufficient power to disable a UAV with an effective range of the HERF weapon **102**. Outside that FOV, the power output of the HERF weapon may fall off substantially.

**[0028]** To disable the UAV **103**, the HERF weapon **102** may output RF energy that will, if received by the UAV **103**, result in voltages and/or currents that damage and/or destroy reception and/or other circuitry of the UAV **103**. The power of the RF energy output by the HERF weapon **102** may, for example, be at least 30 decibel-milliwatts (dBm) under operational atmospheric conditions and at a range of 1.0 to 1.5 kilometers from the HERF weapon **302** along the main beam axis **150**. Operational atmospheric conditions may, for example, comprise air temperatures between −50° C. and 50° C. and humidity of up to 100%. Operational atmospheric conditions may also comprise the presence of fog and/or precipitation (rain or snow).

**[0029]** FIG. **2** is a block diagram showing additional details of the sensing system **101**. The sensing system **201** may comprise a signal receiver **206**, one or more processor (s) **207**, memory **208**, and one or more I/O controller(s) **209**. The signal receiver **206** may include any of various types of receivers such as, without limitation, RF receivers. The signal receiver **206** may comprise one or more amplifiers (e.g., one or more RF amplifiers, low noise amplifiers, IF amplifiers, AF amplifiers, etc.), tuners, mixers, buffers, oscillators, demodulators, and/or other components. The signal receiver **206** may receive RF signals and process those signals to determine or extract information regarding the signals. The processor(s) **207** may include any of various types of computational devices such as, without limitation, programmable microprocessors. The processor(s) **207** may execute instructions that cause the sensing system **101** to perform one or more operations such as are described herein. The memory **208** may include any of various types of non-transitory machine-readable storage media such as, without limitation, random access memory (RAM), read-only memory (ROM), FLASH memory, magnetic tape or discs, optical discs, etc. The memory **208** may comprise volatile and/or non-volatile memory. The I/O controller(s) **209** may include hardware and/or software that allow user input devices (e.g., a keyboard, a mouse, a touch screen) to communicate data to processor(s) **207**. The I/O controller(s) **209** may also include hardware and/or software that allow user output devices (e.g., display screens, printers) to output user-understandable information based on data from the processor(s) **207**. The I/O controller(s) **209** may further include hardware and/or software that allow processor(s) **207** to communicate with processors of other computing devices (e.g., the control unit **106**) via one or more types of wired or wireless networks, such as for example, Ethernet adaptors and Wi-Fi adaptors (e.g., operating in accordance with one or more IEEE 802.11 WLAN standards).

**[0030]** The memory **208** may store software that provides instructions to processor(s) **207** that, when executed by processor(s) **207**, cause the sensing system **101** to perform operations such as are described herein. The software may comprise machine-executable instructions and other data, and may include both application software and operating system software. Executable instructions that cause sensing system **101** to perform operations such as are described herein may also or alternatively be stored in other forms, e g., as firmware or as hardware logic in an integrated circuit.

**[0031]** The sensing system **101** may be configured to monitor one or more radio frequencies. The frequencies may be monitored continuously or on demand. A user, or operator, of the sensing system may be able to configure the sensing system, or any subpart thereof. The signal receiver **206** may be configured to receive signals from the antenna **104**, the EO/IR system **105**, and/or other types of sensors. The signal receiver **206** may be configured to process and/or convert received signals into usable information. For example, the signal receiver **206** may be configured to filter the incoming signal to determine one or more frequencies associated with signals output by a particular UAV (e.g., the UAV **103**). The processor **207**(*s*) may be configured to evaluate the signals and/or information from the signal receiver **206** and determine locational information for a

target. As discussed above, for example, the processor **207** may be configured to determine locational information for a target using any known methods.

**[0032]** The signal receiver **206** and/or processor **207** may also be configured to receive input from the EO/IR system **105**. For example, the EO/IR system **105** may be configured to detect a target visually or by infrared. The EO/IR system **105** may be configured to store video and/or images of the target and send the video and/or images of the target to the sensing system **101** for processing and/or storage. The EO/IR system **205** may also be configured to determine the range, or distance, to the UAV **103**. The range may be determined using any known means, such as laser, radar, sonar, LIDAR, ultrasonic, optical, GPS, and the like. The range may also be determined by a rangefinder (not shown) which may be separate from the EO/IR system **205** that may be configured to send the range data to the EO/IR system **205** and/or to the sensing system **101**. The I/O controller **209** may be configured to interface with the signal receiver **206**, the EO/IR system **105**, the rangefinder, and/or other sensors to track the UAV **103**.

**[0033]** The sensing system **101** may be configured to display information about a target (e.g., a UAV such as the UAV **103**). The displayed information may comprise one or more of frequency information regarding signals transmitted from or received by the target, video and/or other images, and/or locational information. An operator may determine, based on the displayed information, a threat level for a target. Additionally or alternatively, the sensing system **101** may receive operator input that indicates and/or selects signals of interest that should be further evaluated. An operator may be able to control the antenna **104**, EO/IR system **105**, and or other types of sensor devices, to seek additional information regarding a potential target to assist in assessing a threat level of a target. For example, the operator may be able to change the direction of the antenna **104**, or focus the direction or range of the other sensors. The operator may further be able to control storage of the data in memory **208**.

**[0034]** An operator may be able to designate one or more perimeters around the sensing system **101** and/or HERF weapon **102** that may result in different actions taken by the weapon system **101**. A first predetermined distance may indicate an area over which all signals are closely monitored. A second, smaller predetermined distance may indicate an area over which all targets are considered threats and should be eliminated. For example, the EO/IR system **105** may be configured to identify potential targets within a first distance, e.g., within 2 km, from a vehicle and then track the identified target to determine the whether the identified target is a threat. If the target moves within a second distance, e.g., within 1 km, from the vehicle, the EO/IR system **105** may determine that the identified target is a threat. The sensing system **201** may also be configured to combine locational information with information from a map using augmented or virtual reality technology to provide a visual representation of the target on the map and output the map to the operator.

**[0035]** If a target is determined to be a threat, the sensing system **101** may be configured to communicate information to the control unit **106** and/or otherwise perform actions to prepare the HERF weapon **102** for firing. The communicated information may comprise frequency information and/or locational information for the target. The frequency information may comprise one or more frequencies associated with the UAV **103**. The locational information may comprise any locational information associated with the location direction of the UAV **103**, including, for example, altitude, elevation, azimuth, AoA, LOB and/or other data related to the location or direction of the UAV **103** relative to the sensing system **101** and/or relative to the HERF weapon **102**.

**[0036]** After communicating information to the control unit **106**, the sensing system **101** may continue to monitor the UAV **103** to confirm whether the UAV **103** has been disabled or destroyed (e.g., after the HERF weapon **102** is fired). The sensing system **101** may confirm destruction visually or by monitoring the frequencies associated with the UAV **103**. If the sensing system **101** continues to detect the UAV **103**, the sensing system **101** may communicate updated frequency and/or locational information about the UAV **103** to the control unit **106** and/or otherwise take action to facilitate firing (e.g., additional firing) of the HERF weapon **102** to disable or destroy the UAV **103**.

**[0037]** The sensing system **101** may be configured to store the information associated with the UAV **103** in memory **208**. The sensing system **101** may also be configured to store the time and/or date the UAV **103** was detected along with the information associated with the UAV **103**. The sensing system **101** may be configured to store an indication as to whether the UAV **103** was disabled or destroyed. The sensing system **101** may also, or alternatively, be in communication with a network storage device and may be configured to send the information associated with the UAV **103** to the network storage device for storage.

**[0038]** FIGS. **3**A-**3**D are block diagrams showing different views and additional details of the HERF weapon **102** and the mounting system **107**. FIG. **3**A is a side view of the HERF weapon **102**. The HERF weapon **102** may be pivotally mounted on the weapon mount(s) **109** and tiltable through a range of elevation angles. The weapon mount(s) **109** may be of any shape and/or style that allows the HERF weapon **102** tilt (e.g., about horizontal axes). The weapon mount(s) **109** may be connected directly, or indirectly, to the base **108**. The base **108** may be operatively connected to the motor **110** and may be configured to rotate (e.g., about a vertical axis). The motor **110** may be configured to receive orientation control signals from the control unit **106** and, based on those received signals, rotate, or pan, the base **108**. Panning and tilting allow orientation of the HERF weapon to aim the beam axis **150** at the UAV **103** by, for example, aligning the beam axis **150** with a LOB to the UAV **103**.

**[0039]** FIG. **3**B is a rear view of the HERF weapon **102** and the mounting system **107** and shows a motor **310***b* configured to control tilt of the HERF weapon **302**. The motor **310***b* may be configured to receive control signals from the control unit **106** and, based on those received signals, tilt the HERF weapon **102** up and down. FIG. **3**C a side view of the HERF weapon **102** and the mounting system **107** from a side opposite to that shown in FIG. **3**A. In FIG. **3**C, a tilted position of the HERF weapon **102** is shown by a dashed line. FIG. **3**D is a top view of the HERF weapon **102** and the mounting system **107**. In FIG. **3**D, a panned position of the HERF weapon **102** is shown by a dashed line. The HERF weapon **102** may be simultaneously panned and tilted to aim at the UAV **103**.

**[0040]** FIG. **4** is a block diagram showing additional details of the control unit **106** and the HERF weapon **102**.

The control unit **106** may comprise one or more I/O controller(s) **412**, one or more processor(s) **413**, memory **414**, and a trigger security system **415**. The memory **414** may comprise hardware components similar to those described for the memory **208** and may be store software that provides instructions to processor(s) **413** that, when executed by processor(s) **413**, cause the control unit **106** to perform operations such as are described herein. The software may comprise machine-executable instructions and/or other data, and may include both application software and operating system software. Executable instructions that cause the control unit **106** to perform operations such as are described herein may also or alternatively be stored in other forms, e g., as firmware or as hardware logic in an integrated circuit.

**[0041]** The I/O controller(s) **412** may comprise hardware components similar to those described for the I/O controller (s) **209** and may be configured to communicate with and/or receive signals from the sensing system **101** and pass the communication/signals to the processor(s) **413**. The I/O controller(s) **412** may use a two-way wired, wireless, or optical link to communicate signals and/or control information. The I/O controllers(s) **412** may also be configured to receive operator input via an input device (e.g., keypad, keyboard, mouse, touchscreen). The processor(s) **413** may comprise hardware components similar to those described for the processor(s) **207** and may be configured to execute instructions (e.g., stored in the memory **414**) that cause that control unit **106** to carry out operations such as those described herein. The processor(s) may also be configured to generate and/or cause display information to the operator regarding the target on a display device (not shown).

**[0042]** The processor(s) **413** may be configured to receive signals from the sensing system **101** via the I/O controller(s) **412** and to generate control signals to orient the HERF weapon **102** (e.g., in preparation for firing). The signals received from the sensing system **101** may comprise locational information for the UAV **103**, such as, for example, the LOB from the HERF weapon **102** to the UAV **103** and/or the range to the UAV **103**. Based on the locational information, the processor **413** may be configured to determine mechanical adjustments (e.g., pan and tilt) to the mounting system **107** to aim the HERF weapon **102** at the UAV **103**. The processor(s) **413** may be further configured to generate and send one or more orientation control signals to the mounting system **107** to orient the HERF weapon **102** based on the determined mechanical adjustments. The signals received from the sensing system **101** may also comprise frequency information for the UAV **103**. Based on the frequency information, the processor **413** may be configured to generate and send one or more emitting control signals, to the HERF weapon **102**, that causes the HERF weapon **102** to emit an RF signal at a frequency associated with the UAV **103**. The processor(s) **413** may be configured to store the frequency and/or locational information regarding the UAV **103** in the memory **414** for storage. Such frequency and/or locational information may be stored until the target has been destroyed, or may be maintained in memory the **414** (e.g., for creating a log of the targets and/or emissions of the HERF weapon **402**).

**[0043]** The trigger security system **415** may be configured to prevent unauthorized use of the HERF weapon **102**. For example, the trigger security system **415** may comprise an input device (e.g., a keypad, keyboard, key switch, mouse, touchscreen, fingerprint or other biometric reader, etc.) for entering or confirming identification or authorization credentials (e.g., physical key, password, ID number, fingerprint etc.). Information entered into the trigger security system may be stored in the memory **414**. The trigger security system **415** may prevent unauthorized access to the HERF weapon **102** and/or may maintain a record of who authorized the HERF weapon **102** to be fired.

**[0044]** The HERF weapon **102** may comprise, in addition to the antenna **111**, a signal generator **416**, a frequency converter **417**, a gain control **418**, and/or one or more amplifier(s) **419**. The signal generator **416** may comprise an RF source and may be configured to receive signals from the control unit **106**. The signal generator may be configured to generate a pulse of energy at an output power level based on the received signal(s). The output power level may be a default, or predetermined, output power level or may be determined based on the range of the UAV **103** from the HERF weapon **102**. The signal generator **416** may also be configured to generate signals at a range of frequencies. The signal generator **416** may further be configured to send the generated signal(s) to the frequency converter **417**. The frequency converter may comprise a transmit/receive RF head and may be configured to receive the generated signal (s) and may convert the frequency of the signal(s) up or down based on the frequency information received from the control unit **106**. Additionally, or alternatively, the HERF weapon **402** may receive a signal from the UAV **103** via the antenna **111**. The signal generator **416** may further comprise a phase-locked loop and may be configured to match of the frequency of the received signal from the UAV **103**.

**[0045]** The gain control **418** may be configured to adjust or maintain the power of the output signal. The gain control **418** may adjust the power based on the range to the target and/or the perceived threat level of the target. For example, if the UAV **103** is identified as a low risk threat, the power of the RF signal output from the HERF weapon **102** may be adjusted to cause a positive voltage gain, or increased voltage, in the UAV **103** to disrupt or disable the UAV **103** without destroying it. If the UAV **103** is identified as high risk, the power of the RF signal output from the HERF weapon **102** may be adjusted to cause a positive current gain, or increased amperage, in the UAV to damage electronic traces in the UAV **103** circuitry, and thereby destroy the UAV **103**.

**[0046]** The amplifier(s) **419** may comprise any of a variety of commercially available RF amplifiers. The amplifier **419** may be configured to increase the power of the output signal based on the gain control **418**. The amplifier **419** may be located within, or separate from, the signal generator **416**.

**[0047]** The antenna **111** may be configurable, for example, by adjusting an antenna aperture. A narrow physical and/or effective aperture provides a more focused emitted signal to more effectively eliminate a signal target. Additionally, or alternatively, drone swarms may operate on the same frequency. By widening the aperture, the swarm may be targeted as a whole.

**[0048]** The HERF weapon **102** may be configured to emit RF output via the antenna **111** automatically after set up is complete or based on the operator activating a trigger or entering a trigger command to the HERF weapon and/or to the control unit **106**. The HERF weapon **102** may be configured to emit a RF signal pulse, multiple pulses, or a continuous RF signal (e.g., until a kill is confirmed). By emitting a signal at or near the operating frequency of the

UAV **103**, the HERF weapon **102** signature may be masked from discovery by hostile forces. Because the frequency of the emitted signal matches the frequency already in use by the UAV **103**, the operator of the UAV **103** may not recognize the signal emitted from the HERF weapon **102** as being different from signals emitted by the UAV **103**.

**[0049]** FIGS. **5**A and **5**B are a flow chart showing an example method for detecting, gathering information regarding, disabling, and/or destroying a potential target (e.g., the UAV **103** and/or other targets or potential targets). As explained below, some steps of the example method may be performed by the sensing system **101** and other steps of the method may be performed by the control unit **106** and/or the HERF weapon **102**. The method of FIGS. **5**A and **5**B may be subdivided and/or performed as separate methods. One, some, or all of the steps shown in FIGS. **5**A and **5**B may also, or alternatively, be performed by one or more other elements in the system of FIG. **1**. For example, the sensing system **101** and the control unit **106** could be combined into a single computing device. The steps shown in FIGS. **5**A and **5**B and/or one or more other steps may be performed based on execution, by one or more processors of one or more computing devices, of instructions that are stored in a computer-readable medium, such as a non-transitory computer-readable memory. The steps shown in FIGS. **5**A and **5**B need not all be performed in the order described or shown, and/or some steps may be omitted and/or otherwise changed. Additional steps may be added.

**[0050]** In step **502**, the sensing system **101** may monitor signals received from one or more input devices, such as one or more antennas (e.g., antenna **104**) and/or one or more EO/IR systems (e.g., EO/IR system **105**), to scan for potential targets. In step **504**, the sensing system **101** may detect a target, such as the UAV **103**. If a target is not detected, the sensing system **101** may continue to scan for potential targets. If the UAV **103** is detected, the sensing system **101** may, in step **506**, analyze the information from the input devices and determine one or more frequencies on which the UAV **103** is operating. In step **508**, the sensing system **101** may determine locational information for the UAV **103**. For example, the sensing system **101** may use data from the one or more input devices to determine locational information associated with the UAV **103** using triangulation, radio location, and/or other methods of locating a signal transmitter. As part of step **508**, the sensing system **101** may determine the elevation and/or azimuth of the UAV **103**, and/or the sensing system **101** may further be configured to determine a range to the UAV **103**. As part of step **508**, the sensing system may determine (e.g., based on multiple positions over time) a course of travel and/or speed of the UAV **103**. In step **510**, the sensing system **101** may (e.g., if the sensing system **101** and the HERF weapon **102** are not co-located) convert locational information regarding the UAV (e.g., location, range, AoA, LOB, course, and/or speed) of the UAV **103** relative to the sensing system **101** to locational information (e.g., location, range, AoA, LOB, course, and/or speed) of the UAV **103** relative to the HERF weapon **102**. The conversion of step **510** may, for example, be based on position data (e.g., global positioning system (GPS) coordinates) associated with the sensing system **101** and on position data associated with the HERF weapon **102**.

**[0051]** In step **512**, the sensing system **101** may send, to the control unit **106** of the HERF weapon **102**, the frequency information from step **506** and the converted locational information from step **510**. The control unit **106** may receive that information in step **514**. In step **516**, the control unit **106** may determine (e.g., based on the locational information) if the UAV **103** is within range (e.g., 1 km, 1.5 km, or other value). If the UAV **103** is not in range, the control unit **106** may in step **518** communicate the out-of-range condition to the sensing system **101** and cause steps **506**-**514** to be repeated. If the UAV **103** is in range, the control unit **106** may, in step **520** (FIG. **5**B), send a control signal to the mounting system **107** to adjust the mounting system **107** and orient (e.g., aim) the HERF weapon **107**. The control signal sent in step **520** may be based on the converted locational information received in step **514**. The control signal sent in step **520** may comprise a series of control signals that causes the mounting system **107** to continuously move so as to track the UAV **103** (e.g., by keeping the UAV **103** within the FOV of the HERF weapon **102** as the UAV moves relative to the HERF weapon **102**). In step **522**, the control unit **106** may send a control signal, to the HERF weapon **102**, that configures the signal generator **416**, the frequency converter **417**, the gain control **418**, and/or other components of the HERF weapon **102** to generate a signal that matches the operating frequency of the UAV **103**. The control signal sent in step **522** may be based on the frequency information received in step **514**. In step **524**, the HERF weapon **102** may receive a trigger input. The trigger input may be manual at the HERF weapon **102** (e.g., a traditional firearm trigger, toggle switch, button, etc.) or at the control unit **106** (e.g., pushing a button, input through a control screen, etc.). In step **526**, the trigger security system may confirm that an authorization input (e.g., a password, a physical key, etc.) allowing firing of the HERF weapon **102** was previously received (e.g., when activating the HERF weapon **102** and/or when disengaging a safety switch). If the authorization input is not confirmed, the process may end without the HERF weapon **102** being fired. If the authorization input is confirmed, the HERF weapon **102** may in step **528** emit one or more RF pulses at the power and frequency(ies) configured based on the control signals of step **522**, and while the HERF weapon **102** is in the orientation resulting from the control signals of step **520**. In step **530**, the control unit **106** may determine, or may receive a signal from the sensing system **101** indicating, whether the UAV **103** was disabled or destroyed (e.g., a signal indicating whether or not the UAV **103** is still operating). If the UAV **103** was not disabled or destroyed, the control unit **106** may in step **532** communicate with the sensing system **101** to request an update of frequency information for the UAV **103** and/or of locational information regarding the UAV **103**. The communication of step **532** may cause the sensing system **101** to repeat steps **506**-**512**. If the UAV **103** is determined in step **530** to have been disabled or destroyed, the process may end.

**[0052]** As indicated above, one or more of the steps in FIGS. **5**A and **5**B may be performed in another order, performed by a different device, otherwise modified, or omitted. For example, in one embodiment, the sensing system **101** may not need to convert locational information determined by the sensing system **101** (e.g., in step **508**) into locational information relative to a position of the HERF weapon **102**. As indicated above, the HERF weapon **102** and the sensing system **101** may be co-located, and locational information determined by the sensing system **101** may thus not require conversion. As another example, step **510** may instead be performed by the control unit **106** based on the

locational information determined in step **508**, based on position data (e.g., GPS coordinates) for the sensing system **101**, and based on position data for the HERF weapon **102**.

**[0053]** The foregoing has been presented for purposes of example. The foregoing is not intended to be exhaustive or to limit features to the precise form disclosed. The examples discussed herein were chosen and described in order to explain principles and the nature of various examples and their practical application to enable one skilled in the art to use these and other implementations with various modifications as are suited to the particular use contemplated. The scope of this disclosure encompasses, but is not limited to, any and all combinations, sub-combinations, and permutations of structure, operations, and/or other features described herein and in the accompanying drawing figures.

**1**. A method for directing high-intensity beams toward a swarm of unmanned aerial vehicles (UAVs), the method comprising:
- receiving a location of the swarm of UAVs;
- orienting, based on the location, a directional antenna toward the swarm of UAVs;
- adjusting an aperture of the directional antenna;
- emitting, via the directional antenna, an RF signal, wherein:
  - the RF signal comprises RF energy at a power configured, along a beam axis of the directional antenna at a range between 1 kilometer and 1.5 kilometers from the directional antenna, to disable the swarm of UAVs; and
  - the RF energy decreases outside a field of view of the directional antenna.

**2**. The method of claim **1**, wherein the orienting the directional antenna comprises sending control signals to cause movement of a mounting system of the directional antenna.

**3**. The method of claim **1**, wherein the field of view of the directional antenna is approximately 20 degrees.

**4**. The method of claim **1**, wherein the directional antenna comprises at least one of a parabolic antenna, a helical antenna, a yagi antenna, a log-periodic antenna, a horn antenna, or a phased array antenna.

**5**. The method of claim **1**, further comprising:
- determining, based on the location of the swarm of UAVs, that a range to the swarm of UAVs satisfies a threshold, wherein the emitting the RF signal is based on the determining that the range satisfies the threshold.

**6**. The method of claim **1**, further comprising:
- receiving, after the emitting, an indication that at least one UAV of the swarm of UAVs is still operating; and
- emitting, based on the indication that the at least one UAV is still operating, a second RF signal comprising RF energy at a power configured, along the beam axis of the directional antenna at a range between 1 kilometer and 1.5 kilometers from the directional antenna, to disable the at least one UAV.

**7**. The method of claim **1**, wherein the receiving the location comprises:
- receiving a second location of the swarm of UAVs relative to a sensing system; and
- determining the location by converting the second location relative to the directional antenna, wherein the sensing system and the directional antenna are not co-located.

**8**. A system for directing high-intensity beams toward a swarm of unmanned aerial vehicle (UAVs), the system comprising:
- a directional antenna;
- a radio frequency (RF) signal generator and amplifier configured to cause emission, via the directional antenna, of RF signals; and
- a control unit comprising one or more processors and memory storing instructions that, when executed by the one or more processors, cause the system to:
  - receive a location of the swarm of UAVs;
  - orient, based on the location, the directional antenna toward the swarm of UAVs;
  - adjust an aperture of the directional antenna;
  - emit, via the directional antenna, an RF signal, wherein:
    - the RF signal comprises RF energy at a power configured, along a beam axis of the directional antenna at a range between 1 kilometer and 1.5 kilometers from the directional antenna, to disable the swarm of UAVs; and
    - the RF energy decreases outside a field of view of the directional antenna.

**9**. The system of claim **8**, wherein the instructions, when executed by the one or more processors, cause the system to orient the directional antenna by sending control signals to cause movement of a mounting system of the directional antenna.

**10**. The system of claim **8**, wherein the field of view of the directional antenna is approximately 20 degrees.

**11**. The system of claim **8**, wherein the directional antenna comprises at least one of a parabolic antenna, a helical antenna, a yagi antenna, a log-periodic antenna, a horn antenna, or a phased array antenna.

**12**. The system of claim **8**, wherein the instructions, when executed by the one or more processors, cause the system to determine, based on the location of the swarm of UAVs, that a range to the swarm of UAVs satisfies a threshold, wherein the emitting the RF signal is based on a determination that the range satisfies the threshold.

**13**. The system of claim **8**, wherein the instructions, when executed by the one or more processors, cause the system to:
- receive, after the emitting, an indication that at least one UAV of the swarm of UAVs is still operating; and
- emit, based on the indication that the at least one UAV is still operating, a second RF signal comprising RF energy at a power configured, along the beam axis of the directional antenna at a range between 1 kilometer and 1.5 kilometers from the directional antenna, to disable the at least one UAV.

**14**. The system of claim **8**, wherein the instructions, when executed by the one or more processors, cause the system to receive the location by:
- receiving a second location of the swarm of UAVs relative to a sensing system; and
- determining the location by converting the second location relative to the directional antenna, wherein the sensing system and the directional antenna are not co-located.

**15**. A non-transitory computer-readable medium comprising instructions that, when executed, cause a system for directing high-intensity beams toward a swarm of unmanned aerial vehicle (UAVs) to:
- receive a location of the swarm of UAVs;

orient, based on the location, a directional antenna toward the swarm of UAVs;

adjust an aperture of the directional antenna;

emit, via the directional antenna, an RF signal, wherein:

the RF signal comprises RF energy at a power configured, along a beam axis of the directional antenna at a range between 1 kilometer and 1.5 kilometers from the directional antenna, to disable the swarm of UAVs; and

the RF energy decreases outside a field of view of the directional antenna.

**16**. The non-transitory computer-readable medium of claim **15**, wherein the instructions, when executed, cause the system to orient the directional antenna by sending control signals to cause movement of a mounting system of the directional antenna.

**17**. The non-transitory computer-readable medium of claim **15**, wherein the field of view of the directional antenna is approximately 20 degrees.

**18**. The non-transitory computer-readable medium of claim **15**, wherein the directional antenna comprises at least one of a parabolic antenna, a helical antenna, a yagi antenna, a log-periodic antenna, a horn antenna, or a phased array antenna.

**19**. The non-transitory computer-readable medium of claim **15**, wherein the instructions, when executed, cause the system to determine, based on the location of the swarm of UAVs, that a range to the swarm of UAVs satisfies a threshold, wherein the emitting the RF signal is based on a determination that the range satisfies the threshold.

**20**. The non-transitory computer-readable medium of claim **15**, wherein the instructions, when executed, cause the system to:

receive, after the emitting, an indication that at least one UAV of the swarm of UAVs is still operating; and

emit, based on the indication that the at least one UAV is still operating, a second RF signal comprising RF energy at a power configured, along the beam axis of the directional antenna at a range between 1 kilometer and 1.5 kilometers from the directional antenna, to disable the at least one UAV.

**21**. The non-transitory computer-readable medium of claim **15**, wherein the instructions, when executed, cause the system to receive the location by:

receiving a second location of the swarm of UAVs relative to a sensing system; and

determining the location by converting the second location relative to the directional antenna, wherein the sensing system and the directional antenna are not co-located.

* * * * *